


05 | OUTDOOR- LOOSE TUBE DROP CABLE

Cable struction

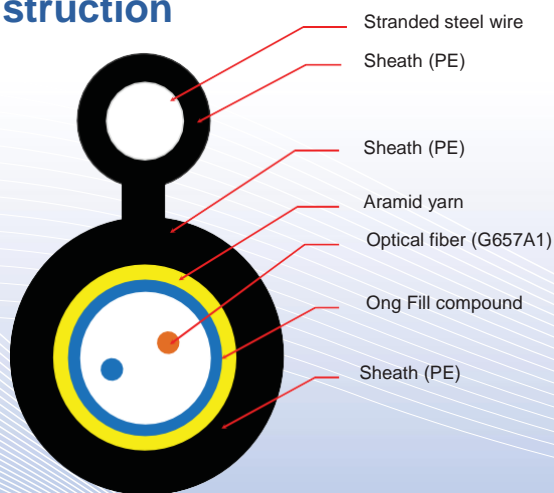

Featur & Application

- Small diameter, light weight, small bending radius and easily to install.
- Indoor and outdoor cabling, working as connection cable from access terminal box to subscribers, suitable with AON/GPON/CATV network.

Mechanical & Environmental Characteristics

SPECIFICATIONS	Chi tiêu
Number of optical fiber	01 Fo ÷ 04 Fo
Cable diameter	4.0mm ± 0.2mm
Overhead	80m
Maximum load (installtion)	500N
Maximum load (Operation)	400N
Temperature ranger (installtion)	-5°C ÷ 65°C
Temperature ranger (operation)	-10°C ÷ 65°C
Bending Radius (installtion)	10*D (D= Cable diameter)
Bending Radius (operation)	20*D (D= Cable diameter)
Longevity	≥ 10 Years

Identification

TIA/EIA-598-A Compliance	
Fiber account	Color
1	NA (any color)
2	Blue; Orange
4	Blue; Orange; Green; Brown

Optical Characteristics

Specifications	Unit	Fiber tyle: SM-ITU-T G.652D
*. Geometrical characteristics		
Mode field diameter at 1310nm	μm	9.2 ± 0.4
Cladding diameter	μm	125 ± 1
Core-clad concentricity	μm	≤ 0.6
Cladding non-circularity	%	≤ 0.7
Coating diameter	μm	245 ± 10 (none color) 250 ± 10 (including color)
*. Transmission characteristics		
Attenuation at wavelength: 1310nm÷1625nm	dB/km	≤ 0.4
Attenuation at 1550nm	dB/km	≤ 0.3
Chromatic dispersion	ps/nm.km	≤ 3.5 at 1310nm ≤ 18 at 1550nm
PMD index	ps/km ^{1/2}	≤ 0.2
Zero dispersion wavelength	Nm	1300 ≤ λ _o ≤ 1324
Zero dispersion slope	ps/nm ² .km	≤ 0.092
Cut-off wavelength	Nm	λ _{cc} ≤ 1260
Macrobend loss at 1625nm (radius = 30mm * 100 turns)	dB	≤ 0.1
*. Mechanical characteristics		
Proof stress	Gpa	≥ 0.69

*. Using the optical fiber from Corning, Fujikura, Sumitomo and Furukawa.

Informations and parking

- The informations of the cable is printed per meter length complies with IEEE P1222. Other information will be printed as the request of customer.
- Standard length: 3000m or is packed according to customer's requirements.